rasilient
enabling forensic-grade surveillance™

ApplianceStor15

Mid-Tower NVR

Datasheet

The AS15MT is optimized for small video surveillance applications and delivers the performance required for the most demanding megapixel installations. With it's small form factor it is ideally suited for small under counter or counter-top applications.

Powerful server and storage system, built around the efficient Intel i3 processor.

Purpose-built open platform to integrate Video Management Software (VMS). All major VMS providers are pre-qualified. Most are continually added to ensure the widest possible certification coverage.

Effortless installation, management and administration.

Rasilient provides a **complete physcial security solution**. All necessary components are offered, including high-performance recording, viewing/monitoring and administration servers, and high-performance storage.

Features

- HD7750 GPU
- Intel i3 CPU
- Up to 32GB RAM

Applications

- Security Operation Centers (SOCs)
- Small to Medium Installations

Copyright © 2021 Rasilient Systems, Inc. Specifications are subject to change without notice

For more information contact:
Tel: +1.408.730.2568|**Toll Free:** +1.888.902.8981|**Website:** www.rasilient.com|**Sales:** sales@rasilient.com|**Technical Supprt:** techsupport@rasilient.com

rasilient
enabling forensic-grade surveillance™

ApplianceStor15

Mid-Tower NVR

Specifications

CPU	Intel i3-10100
GPU	Radeon HD7750
RAM	Up to 32GB DDR4 2666Mhz
Networking	2x GbE, WiFi-802.11 a/b/g/n/ac
Input/Output	4x USB 3.2, 4x USB 2.0, DVD R/W, 3x HDMI, mDP, DP
Max Storage	Up to 32TB (via 2x 3.5" HDD)
Dimensions (W x D x H)	8.7" x 13.5" x 5.1" / 220 x 129 x 340 mm
Weight	Max 15 Lbs / 6.8Kgs
Power Supply	1x 250W 115/230V AC 10A 50-60Hz
Operating Temperature	10 - 35 °C
Recording Performance[1]	80 Mbps

[1] Recording performance was testing using Milestone XProtect VMS. Performance may be different for other VMS.

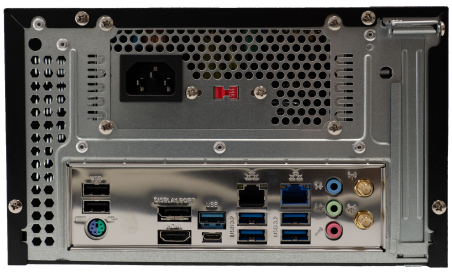

*actual orientation of product may differ based on options

Copyright © 2021 Rasilient Systems, Inc. Specifications are subject to change without notice

For more information contact:

Tel: +1.408.730.2568|**Toll Free:** +1.888.902.8981|**Website:** www.rasilient.com|**Sales:** sales@rasilient.com|**Technical Supprt:** techsupport@rasilient.com

2021/02/09 v3.1